










TERMINAL CONFIGURATION

ACTION REQUIRED	TERMINAL DISPLAY
1. Force terminal to <i>Maintenance</i> menu screen by holding down FUNCTION button and connecting to power supply	
2. Select " 1.Deployment Config "	
3. Select " 1.Terminal Config "	
4. Select " 1.Yes " (The terminal gets an IP address assigned automatically)	
5. Select " 1.Enable " if daylight savings is observed (Time adjusts automatically) OR Select " 2.Disable " if daylight savings is not observed	


ACTION REQUIRED	TERMINAL DISPLAY
6. Key in current time Press the hot-key next to AM or PM to switch selection and press ENTER	
7. Select " 1.Yes " to configure download host	
8. Select " 1.Edit/View Host "	
9. Key in TID (No check digit is needed) Press ENTER to confirm	
10. Select connection type Select "2.IP/Ethernet" for IP download, follow step 11 OR Select "1.Dial" for dial download, jump to step 18	



IP / ETHERNET DOWNLOAD

ACTION REQUIRED **TERMINAL DISPLAY**

11. *Host Connection Method* screen displays if **"2.IP/Ethernet"** is previously selected from the *Download Connection Type* screen

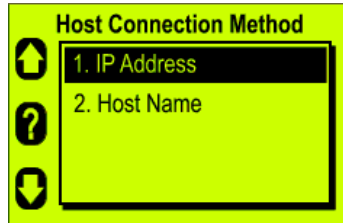

12. **OPTION 1:** Select **"1.IP Address"** ex. 192.168.1.10
OPTION 2: Select **"2.Host Name"** ex. www.hypercom.com



IP ADDRESS



HOST NAME


13. Key in the host **IP Address** or **Host Name** and press **ENTER**

IP Address: Press the asterisk key to switch to the next octet.

Host Name: Hold **SHIFT** and press desired letter on the keypad. Press "0" then "#" for special characters.




14. Key in host **Port Number** and press **ENTER**

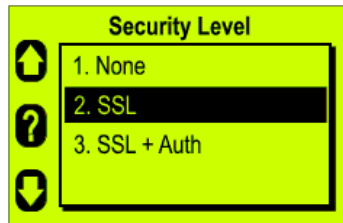


ACTION REQUIRED **TERMINAL DISPLAY**


15. Select Security Level
 Default is set to **"2. SSL"**

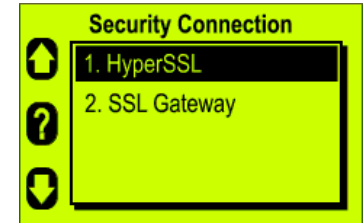


16. Select **"1.HyperSSL"** for Term-Master with standard certificate or **"2.SSL Gateway"** for SSL via IP gateway
 Default is set to **"HyperSSL"**

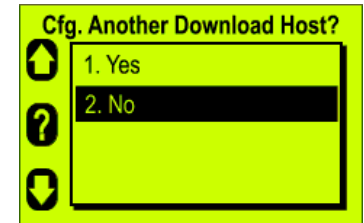

17. Select **"2.No"** when prompted to Configure Another Host

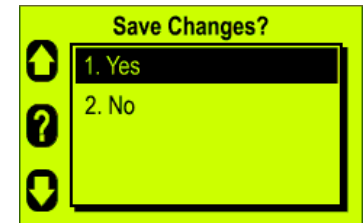


18. Select **"1.Yes"** to save new configuration

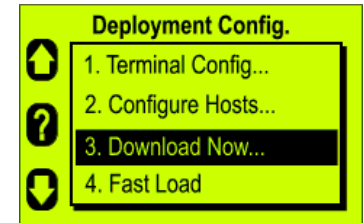

Select **"3.Download Now"**
 Press **ENTER** to bypass warning message and begin download

Terminal downloads application parameters rebooting upon successful download. (see step 25 for more detail)

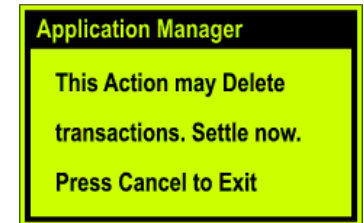



DIAL DOWNLOAD

ACTION REQUIRED	TERMINAL DISPLAY	ACTION REQUIRED	TERMINAL DISPLAY
<p>19. Dial Download Menu screen displays if "1.Dial" is previously selected in Download Connection Type screen</p>		<p>24. Select "3.Download Now"</p>	
<p>20. Select "1.Standard Dialup"</p>		<p>25. Press ENTER to bypass warning message and begin download</p>	
<p>21. Key in download host phone number and press ENTER</p>		<p>26. Terminal connects to host and initiates application download and profile configuration</p>	
<p>22. Select "1.No" when prompted to Configure Another Host</p>		<p>27. Terminal boots up upon completion</p> <p>The applications loaded in the terminal will display on the desktop screen</p> <p>Press hot key next to icon to launch applications</p>	
<p>23. Select "1.Yes" to save recently made changes</p>		<p>Press HOME key to return to desktop screen</p>	